

Cross arms for installing the floodlights are available regarding the amount of floodlights required.


Options for fixing the cross arm depend on pole type: conical-, stepped- or Tehomet -model

Distance between the mounting hole varies by cross arm width: 350 mm, 600 mm.


Mounting hole \varnothing 22 mm



Type	Arm width (mm)	Mounting hole (mm) \varnothing
T010	1000	22
T015	1500	22
T027	2700	22

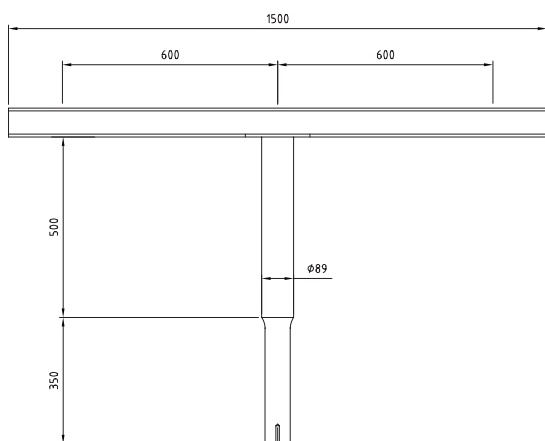

Model for conical poles

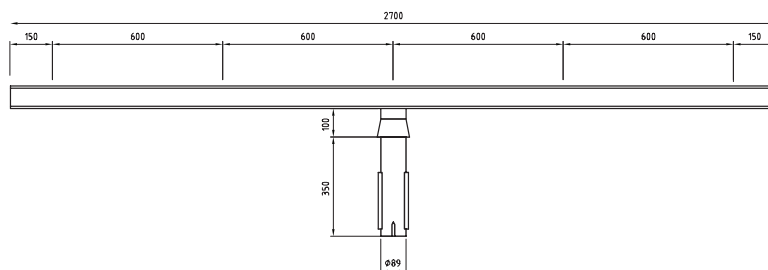

Model for stepped poles

Product sizing: standard EN 40-3-3
 Product manufacturing: standard EN 40-5
 Raw material: low-silicon steel (Si + P \leq 0.04%)
 Zinc coating: international standard EN ISO 1461
 (layer thickness typically $<$ 90 μ m).