

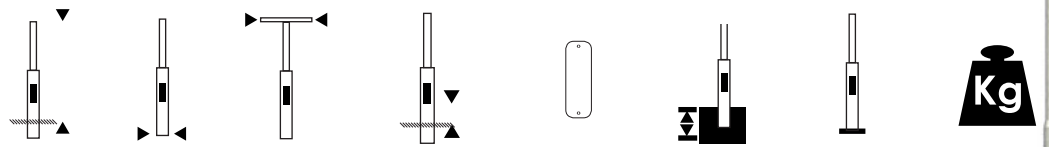


Product sizing: standard EN 40-3-3
 Product manufacturing: standard EN 40-5
 Raw material: low-silicon steel (Si + P ≤ 0.04%)
 Zinc coating: international standard EN ISO 1461
 (layer thickness typically <90 µm).

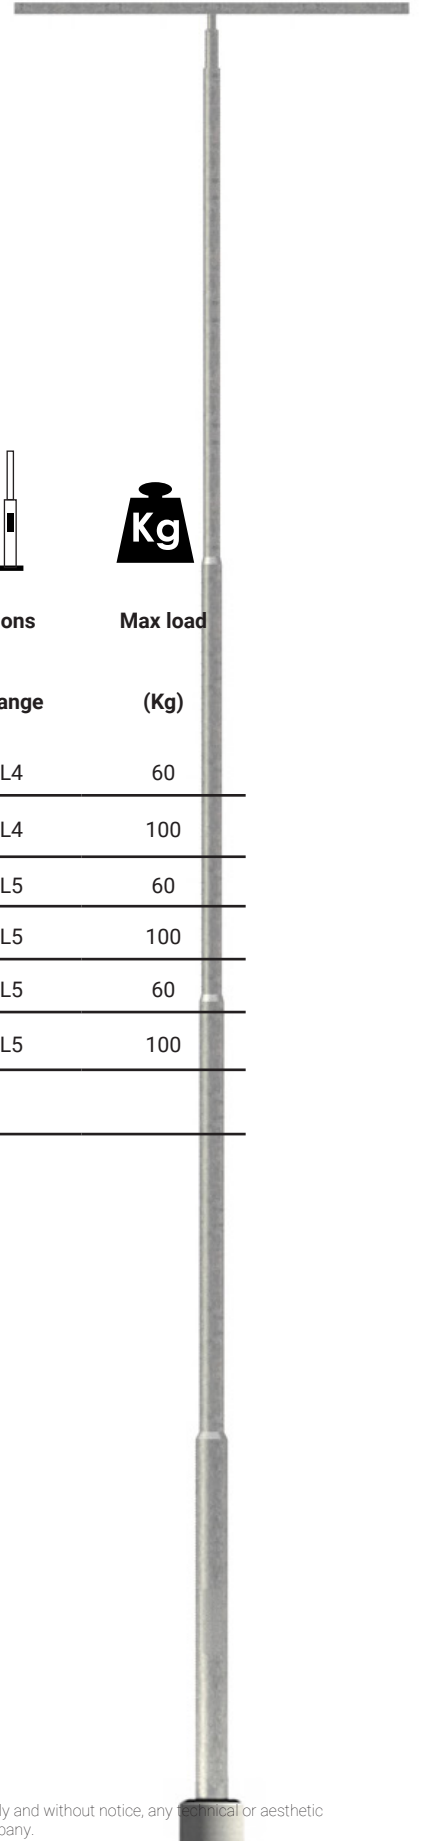


Type	Height (m)	Base diameter (mm)	Arm outreach (mm)	Door distance (mm)	Door ID	Installation options		Max load (Kg)
						Embedding	Flange	
H12T015	12	219	1500	950	A4	600	L4	60
H12T027	12	219	2700	950	A4	600	L4	100
H14T015	14	273	1500	950	A5	1000	L5	60
H14T027	14	273	2700	950	A5	1000	L5	100
H15T015	15	273	1500	950	A5	1000	L5	60
H15T027	15	273	2700	950	A5	1000	L5	100

Sizing on higher stepped area lighting poles are made project wise

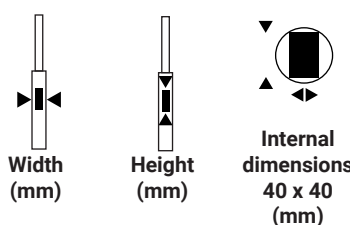

Door ID	Width (mm)	Height (mm)	Internal dimensions 40 x 40 (mm)
A1	80	400	65x65
A2	90	400	80x90
A3	90	400	80x115
A4	100	400	90x160
A5	100	400	90x200

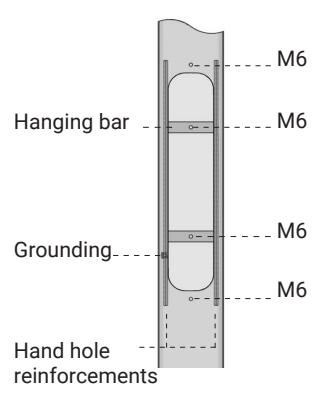

A = Not reinforced

Cross arms for installing the floodlights are available regarding the amount of floodlights required.


Options for fixing the cross arm depend on pole type: conical-, stepped- or Tehomet -model

Distance between the mounting hole varies by cross arm width: 350 mm, 600 mm.


Mounting hole \varnothing 22 mm



Type	Arm width (mm)	Mounting hole (mm) \varnothing
T010	1000	22
T015	1500	22
T027	2700	22

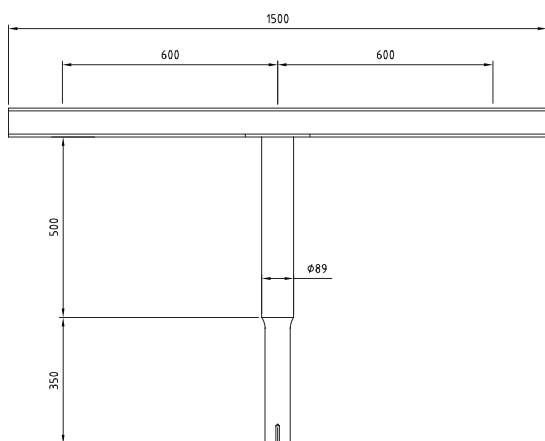

Model for conical poles

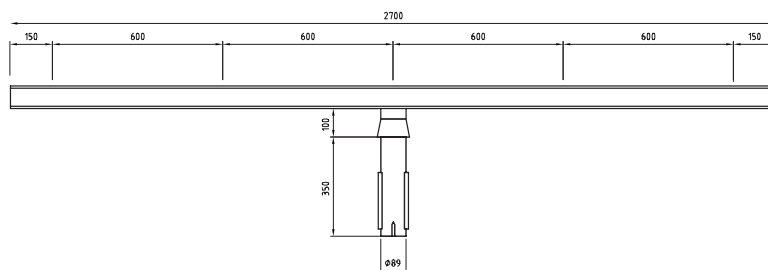

Model for stepped poles

Product sizing: standard EN 40-3-3
 Product manufacturing: standard EN 40-5
 Raw material: low-silicon steel (Si + P \leq 0.04%)
 Zinc coating: international standard EN ISO 1461
 (layer thickness typically $<$ 90 μ m).