



Product sizing: standard EN 40-3-3
 Product manufacturing: standard EN 40-5
 Raw material: low-silicon steel (Si + P ≤ 0.04%)
 Zinc coating: international standard EN ISO 1461
 (layer thickness typically <90 µm)

Attachment of the arm: There are two sets of screws with 3 x 120° division at the top of the pole to attach the arm easily and securely. Cross arm can also be welded to the upright arm.

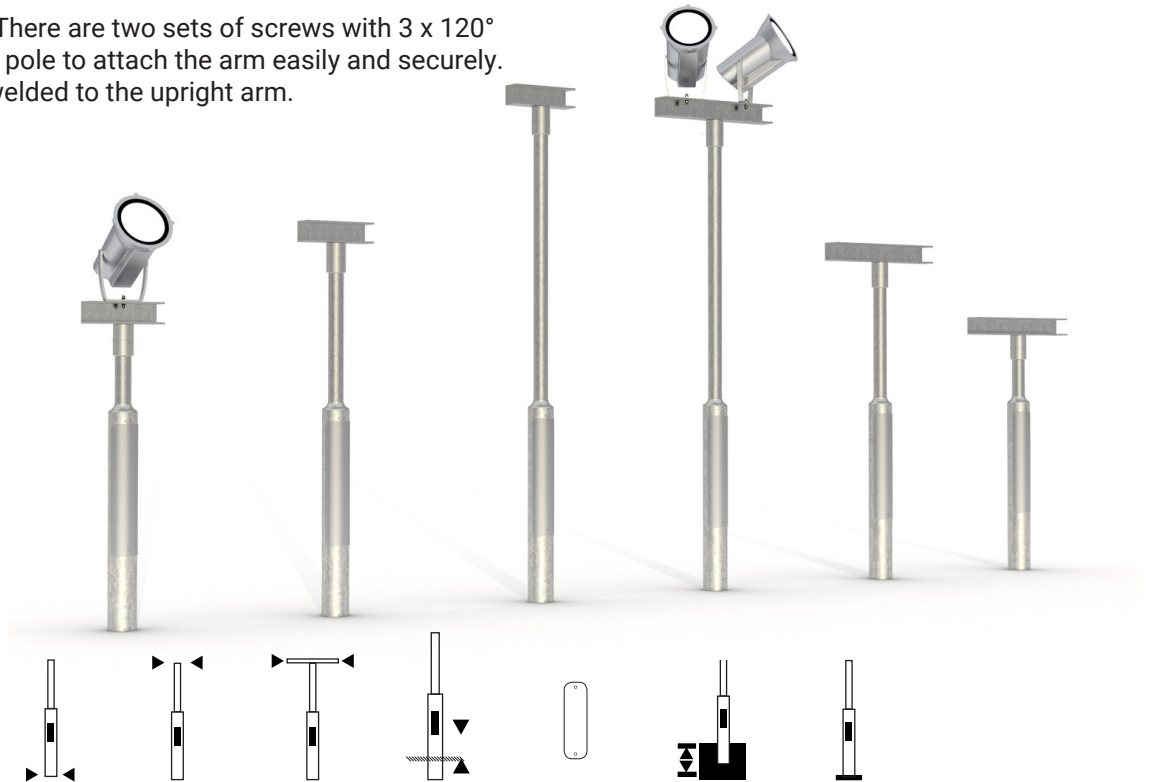

Type	Height (m)	Base diameter (mm)	Top diameter (mm)	Arm Outreach (mm)	Door distance (mm)	Door ID	Installation options	
							Embedding	Flange
KVP1.0/300	1	108	60	300	300	A1	500	L1
KVP1.0/600	1	108	60	600	300	A1	500	L1
KVP1.5/300	1,5	108	60	300	300	A1	500	L1
KVP1.5/600	1,5	108	60	600	300	A1	500	L1
KVP2.0/300	2	108	60	300	300	A1	500	L1
KVP2.0/600	2	108	60	600	300	A1	500	L1

Door ID	Width (mm)	Height (mm)	Internal dimensions 40 x 40 (mm)
A1	80	400	65x65

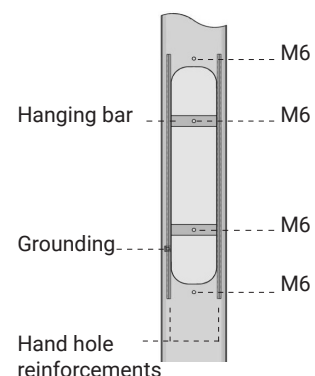

A = Not reinforced