



Product sizing: standard EN 40-3-3
 Product manufacturing: standard EN 40-5
 Raw material: low-silicon steel (Si + P ≤ 0.04%)
 Zinc coating: international standard EN ISO 1461
 (layer thickness typically <90 µm).

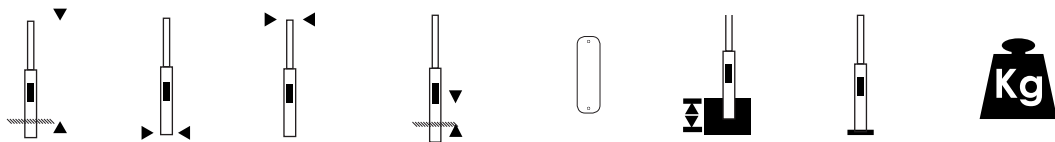

Type	Height (m)	Base diameter (mm)	Top diameter (mm)	Door distance (mm)	Door ID	Installation options		Max load (Kg)
						Embedding	Flange	
8S114	8	114	60	950	A1	600	L1	15
8S140	8	139	60	950	A2	600	L2	30
10S140	10	139	60	950	A2	600	L2	15
10S170	10	168	60	950	A3	600	L3	30
12S170	12	168	60	950	A3	600	L3	15
12S220	12	219	60	1350	A4	600	L4	30
14S220	14	219	60	1350	A4	600	L4	30

Door ID	Width (mm)	Height (mm)	Internal dimensions 40 x 40 (mm)
A1	80	400	65x65
A2	90	400	80x90
A3	90	400	80x115
A4	100	400	90x160

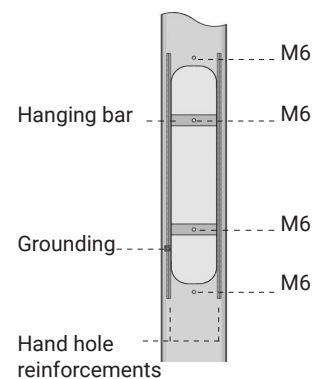

A = Not reinforced