


Product sizing: standard EN 40-3. Product manufacturing: standard EN 40-5  
 Raw material: low-silicon steel (Si + P ≤ 0.04%).  
 Zinc coating: international standard EN ISO 1461 (layer thickness typically <90 µm)


Spigot: diameter 60 mm and length 100 mm

Attachment of the arm: There are two sets of screws with 3 x 120° division at the top of the pole to attach the arm easily and securely.

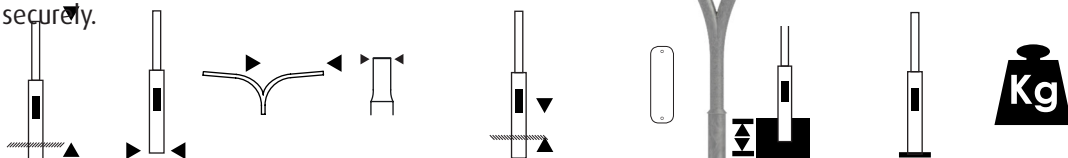

Type	Height (m)	Base diameter (mm)	Arm Outreach (mm)	Spigot Ø (mm)	Door distance (mm)	Door ID	Installation options		Max load (Kg)
							Embedding	Flange	
T110B1080	8	139	1000	60	950	B2	600	L2	15
T210B2080	8	139	1000	60	950	B2	600	L2	30
T110B1100	10	168	1000	60	950	B3	600	L3	15
T210B2100	10	168	1000	60	950	B3	600	L3	30
T225B2100	10	168	2500	60	950	B3	600	L3	15
T325B3100	10	168	2500	60	950	B3	600	L3	30
T210B1120	12	168	1000	60	950	B3	600	L3	15
T310B2120	12	219	1000	60	950	B4	600	L4	30
T325B2120	12	219	2500	60	950	B4	600	L4	15
T225C3120	12	219	2500	60	950	B4	600	L4	30
T140C3120	12	219	4000	60	950	B4	600	L4	15
T225C2150	15	219	2500	60	950	B4	1000	L4	15
T225C3150	15	273	2500	60	950	B5	1000	L5	30
T140C3150	15	273	4000	60	950	B5	1000	L5	15


Door ID	Width (mm)	Height (mm)	Internal dimensions 40 x 40 (mm)
B2	90	400	80x90
B3	90	400	80x115
B4	100	400	90x160
B5	100	400	90x200

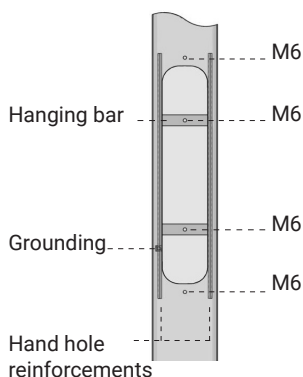

**B = Reinforced**


Product sizing: standard EN 40-3-3  
 Product manufacturing: standard EN 40-5  
 Raw material: low-silicon steel (Si + P ≤ 0.04%)  
 Zinc coating: international standard EN ISO 1461  
 (layer thickness typically <90 µm).

## UPRIGHT ARMS




Type	Pole top diameter Ø (mm)	Height (mm)	Spigot (mm) Ø
S100BO	89	1500	Ø60
S200BO	114	1500	Ø60 L100
S200CO	140	1500	Ø60 L100


## SINGLE ARMS

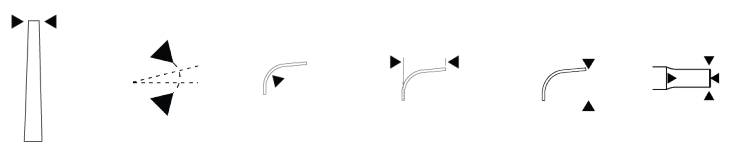

Type	Pole top diameter Ø (mm)	Inclination °	Bending radius	Outreach (mm)	Height (mm)	Spigot (mm) Ø
P110BO	89	5°	500	1000	1500	Ø60
P125BO	89	5°	500	2500	1500	Ø60
P210BO	114	5°	630	1000	1500	Ø60 L100
P225BO	114	5°	630	2500	1500	Ø60 L100
P225CO	140	5°	750	2500	1500	Ø60 L100

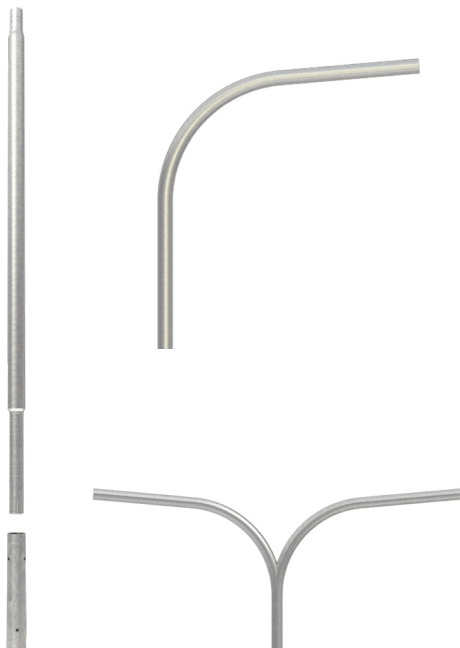

## DOUBLE ARMS

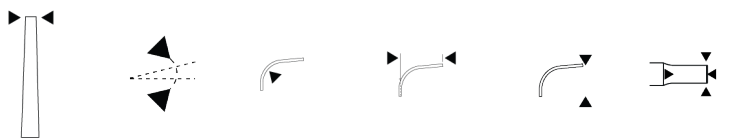

Type	Pole top diameter Ø (mm)	Inclination °	Bending radius	Outreach (mm)	Height (mm)	Spigot (mm) Ø
T110BO	89	5°	500	1000	1500	Ø60
T210BO	114	5°	630	1000	1500	Ø60 L100
T225BO	114	5°	530	2500	1500	Ø60 L100
T310BO	140	5°	750	1000	1537	Ø60 L100
T325BO	140	5°	750	2500	1500	Ø60 L100
T225CO	140	5°	750	2500	1500	Ø60 L100

Attachment of the arm: There are two sets of screws with 3 x 120° division at the top of the pole to attach the arm easily and securely.