


Product sizing: standard EN 40-3-3. Product manufacturing: standard EN 40-5
 Raw material: low-silicon steel (Si + P ≤ 0.04%).
 Zinc coating: international standard EN ISO 1461 (layer thickness typically <90 µm)

Spigot: diameter 60 mm and length 100 mm

Attachment of the arm: There are two sets of screws with 3 x 120° division at the top of the pole to attach the arm easily and securely.

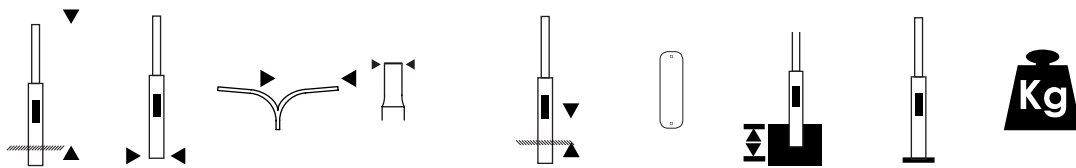


| Type | Height (m) | Base diameter (mm) | Arm Outreach (mm) | Spigot Ø (mm) | Door distance (mm) | Door ID | Installation options | | Max load (Kg) |
|-----------|------------|--------------------|-------------------|---------------|--------------------|---------|----------------------|--------|---------------|
| | | | | | | | Embedding | Flange | |
| P110B1080 | 8 | 139 | 1000 | 60 | 950 | B2 | 600 | L2 | 15 |
| P125B1080 | 8 | 139 | 2500 | 60 | 950 | B2 | 600 | L2 | 15 |
| P210B2080 | 8 | 139 | 1000 | 60 | 950 | B2 | 600 | L2 | 15 |
| P110B1100 | 10 | 168 | 1000 | 60 | 950 | B3 | 600 | L3 | 15 |
| P125B1100 | 10 | 168 | 2500 | 60 | 950 | B3 | 600 | L3 | 30 |
| P210B2100 | 10 | 168 | 1000 | 60 | 950 | B3 | 600 | L3 | 30 |
| P225B2100 | 10 | 168 | 2500 | 60 | 950 | B3 | 600 | L3 | 30 |
| P210B1120 | 12 | 168 | 1000 | 60 | 950 | B3 | 600 | L3 | 30 |
| P225B1120 | 12 | 168 | 2500 | 60 | 950 | B3 | 600 | L3 | 15 |
| P225C2120 | 12 | 219 | 2500 | 60 | 950 | B4 | 600 | L4 | 30 |
| P140C2120 | 12 | 219 | 4000 | 60 | 950 | B4 | 600 | L4 | 15 |
| P225C2150 | 15 | 219 | 2500 | 60 | 950 | B4 | 1000 | L4 | 30 |

| Door ID | Width (mm) | Height (mm) | Internal dimensions 40 x 40 (mm) |
|---------|------------|-------------|----------------------------------|
| B2 | 90 | 400 | 80x90 |
| B3 | 90 | 400 | 80x115 |
| B4 | 100 | 400 | 90x160 |


Product sizing: standard EN 40-3-3
 Product manufacturing: standard EN 40-5
 Raw material: low-silicon steel (Si + P ≤ 0.04%)
 Zinc coating: international standard EN ISO 1461
 (layer thickness typically <90 µm).

UPRIGHT ARMS




| Type | Pole top diameter Ø (mm) | Height (mm) | Spigot (mm) Ø |
|--------|--------------------------|-------------|---------------|
| S100BO | 89 | 1500 | Ø60 |
| S200BO | 114 | 1500 | Ø60 L100 |
| S200CO | 140 | 1500 | Ø60 L100 |


SINGLE ARMS

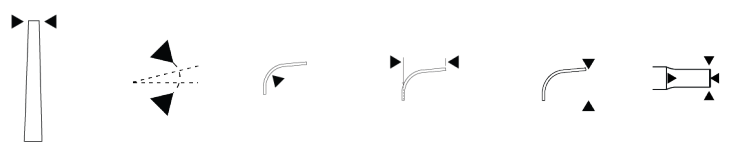

| Type | Pole top diameter Ø (mm) | Inclination ° | Bending radius | Outreach (mm) | Height (mm) | Spigot (mm) Ø |
|--------|--------------------------|---------------|----------------|---------------|-------------|---------------|
| P110BO | 89 | 5° | 500 | 1000 | 1500 | Ø60 |
| P125BO | 89 | 5° | 500 | 2500 | 1500 | Ø60 |
| P210BO | 114 | 5° | 630 | 1000 | 1500 | Ø60 L100 |
| P225BO | 114 | 5° | 630 | 2500 | 1500 | Ø60 L100 |
| P225CO | 140 | 5° | 750 | 2500 | 1500 | Ø60 L100 |

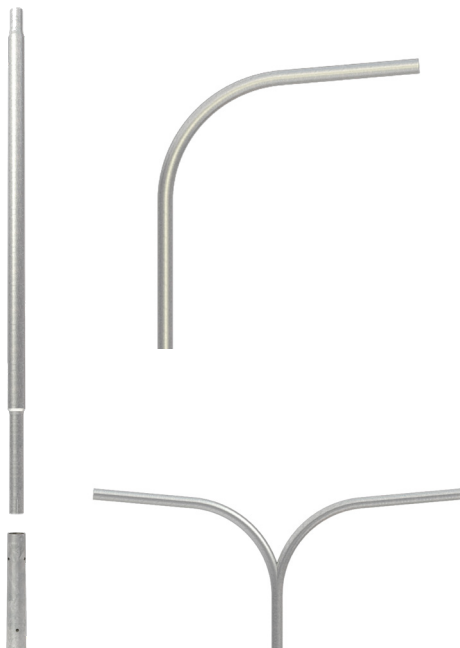

DOUBLE ARMS

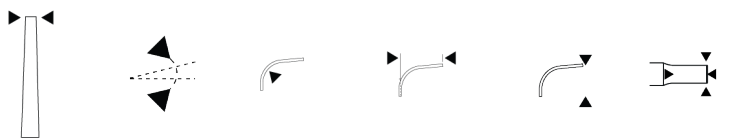

| Type | Pole top diameter Ø (mm) | Inclination ° | Bending radius | Outreach (mm) | Height (mm) | Spigot (mm) Ø |
|--------|--------------------------|---------------|----------------|---------------|-------------|---------------|
| T110BO | 89 | 5° | 500 | 1000 | 1500 | Ø60 |
| T210BO | 114 | 5° | 630 | 1000 | 1500 | Ø60 L100 |
| T225BO | 114 | 5° | 530 | 2500 | 1500 | Ø60 L100 |
| T310BO | 140 | 5° | 750 | 1000 | 1537 | Ø60 L100 |
| T325BO | 140 | 5° | 750 | 2500 | 1500 | Ø60 L100 |
| T225CO | 140 | 5° | 750 | 2500 | 1500 | Ø60 L100 |

Attachment of the arm: There are two sets of screws with 3 x 120° division at the top of the pole to attach the arm easily and securely.