Structural and material specifications

- Product sizing: standard EN 40-3-3
- Product manufacturing: standard EN 40-5
- Raw material: low-silicon steel (Si + P ≤ 0.04%)
- Zinc coating: international standard EN ISO 1461 (layer thickness typically <90 µm)

The lighting adapter of the stepped pole has a diameter of Ø 60 mm and a length of 100 mm.
The pole head features a 3x120° bolt pattern for easy and reliable mounting of the bracket arm.

Single Arms

Electrical number	Type	Pole top diameter Ø (mm)	Inclination °	Bending radius	Outreach (mm)	Height (mm)	Spigot (mm) Ø
4608235	P110BO	89	5°	500	1000	1500	Ø60
4608241	P125BO	89	5°	500	2500	1500	Ø60
4608238	P210BO	114	5°	630	1000	1500	Ø60 L100
4608244	P225BO	114	5°	630	2500	1500	Ø60 L100
4608247	P225CO	140	5°	750	2500	1500	Ø60 L100

Upright Arms

Electrical number	Type	Pole top diameter Ø (mm)	Height (mm)	Spigot (mm) Ø
4608283	S100BO	89	1500	Ø60
4608286	S200BO	114	1500	Ø60 L100
4608289	S200CO	140	1500	Ø60 L100

Double Arms

Electrical number	Type	Pole top diameter Ø (mm)	Inclination °	Bending radius	Outreach (mm)	Height (mm)	Spigot (mm) Ø
4608256	T110BO	89	5°	500	1000	1500	Ø60
4608259	T210BO	114	5°	630	1000	1500	Ø60 L100
4608268	T225BO	114	5°	530	2500	1500	Ø60 L100
4608262	T310BO	140	5°	750	1000	1537	Ø60 L100
4608271	T325BO	140	5°	750	2500	1500	Ø60 L100
4608274	T225CO	140	5°	750	2500	1500	Ø60 L100

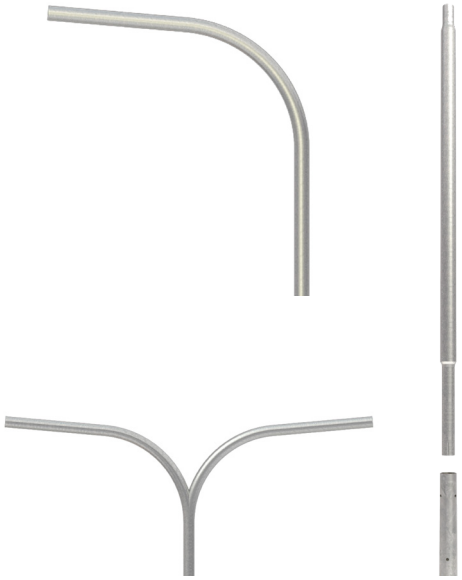

PEFC PEFC/02-31-141

PEFC-certified Finnish wood – responsibly sourced from sustainably managed forests.

DESIGN FROM FINLAND

TEHTY SUOMESSA MADE IN FINLAND

© Tehomet – a Valmont Company. All rights reserved.
All designs and content are the intellectual property of Tehomet.
Specifications are subject to change without prior notice.